

# ARA

S E R I E S



## LARA-100

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 08/06/2026

 **DAS AUDIO**

## KEY FEATURES

- Self-powered cardioid Line array
- 8 channel amplifier, Class D, 6000W<sub>rms</sub>
- Controlled horizontal dispersion up to 80 Hz.
- Cardioid attenuation of -15dB (63 Hz - 200 Hz)
- IP control and monitoring through ALMA™
- FIR processing and digital management via DASaim™

## DESCRIPTION

LARA® is a 4-way symmetrical, cardioid, self-amplified line array system with 6000W<sub>rms</sub> power. LARA® has a linear performance of 146 dB SPL MAX and a wide dynamic range making it an ideal system for large events. Thanks to the cardioid design, we achieve a rear attenuation of -15 dB in the range of 63 Hz - 200 Hz.

LARA® incorporates 2 x 12" woofers with a 4" voice coil plus another 2 x 8" in cardioid configuration; for the midrange, it uses another 2 x 8" speakers with 2.5" voice coils. The high-frequency section is made up of two DAS M-78N compression drivers, with 3" voice coils and a 100° horizontal dispersion waveguide. All the elements have been designed and purpose-built to maximize the system's efficiency.

The LARA® class D amplifier integrates a switching power supply with power factor correction (PFC), ensuring maximum performance and efficiency regardless of the mains voltage. Each amplifier provides 6000W<sub>rms</sub> divided into eight channels, 6 of them in bridge mode to feed the 2 x 12" and the two compression drivers. The remaining two channels feed the front 2 x 8" and rear 2 x 8" transducers.

The 3-point rigging system works for both LARA® and LARA® SUB, allowing us to hang arrays of up to 24 LARA units and 16 LARA® SUB units. The FSS™ (Fast Set Splay) angulation system allows angles to be adjusted in steps of 1°, from 0° to 7° from the stacked position, significantly reducing assembly time.

The packaging of this model includes 1 unit of the product, 1 EC-09 cable, 1 PLINK1-09 cable, and 3 pins.

# LARA-100

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	50 Hz - 18 kHz
Horizontal Coverage (-6 dB)	100°
Vertical Coverage	Splay Dependent
Maximum Linear SPL <sup>1</sup>	146 dB
Maximum SPL <sup>2</sup>	150 dB

1. Measured Maximum Linear SPL at 1m according to AES75 standard using 18dB crest factor M-Noise.

2. Measured Maximum SPL at 1m using burst noise.

### Electronics and Connectors

Nominal Amplifier Power (continuous)	6000 W
Input Type	Balanced Analog
Input Impedance	20 kohms
Input Sensitivity	6.2 V (+18 dBu)
Audio Signal Input Connector	1 x Female XLR
Audio Signal Loop Thru Connector	1 x Male XLR
Audio/Data Input Connector	etherCON
Control	ALMA
Audio + Data Loop Thru Connector	etherCON
AC Input Connector	powerCON TRUE1
AC Output Connector	powerCON TRUE1
Current Draw 230 V / 115 V	7.5 A/15 A
Sampling Rate	96kHz

# LARA-100


## Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal 7°
Rigging	Captive Rigging System
Finish	ISO-flex Paint
Color	Black
IP Rating	IP43
Dimensions ( H x W x D )	355 x 1.170 x 645 mm 14,0 x 46,0 x 25,4 in
Net Weight	86,0 kg ( 189,6 lb )

## Components

LF Driver	12GXNC
MF Driver	8MXN
LF Cardioid Driver	8GXN
HF Driver	M-78N

## DIMENSIONS

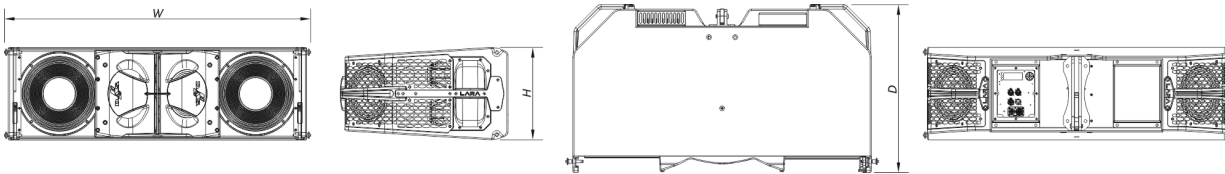

# LARA-100

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 08/06/2026



## ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
LARA-100		10420500
<b>Replacement Parts</b>		
12GXNC	Cone Transducer	20208987
8GXN	Cone Transducer	20208988
8MXN	Cone Transducer	20208989
GM-12GX	Recone Kit	20208065
GM-8GX	Recone Kit	20208538
GM-8MX	Recone Kit	20208539
GM-M75N	Diaphragm	20205080
KIT-DSP-LARA-100	Replacement Dsp	20406640
LITEMOD4HC	Amplifier	30014976
M-78N	Compression Driver	20208860
<b>Accessories</b>		
AX-LARA	Rigging Accessories	10106001
AX-PULL-LARA	Rigging Accessories	10106006
EC-09	Electronic Accessories	20502110
EC-20	Electronic Accessories	20502130
EC-30	Electronic Accessories	20502140
ECPK-20	Electronic Accessories	20502180
FRAME-AX-LARA	Rigging Accessories	10106004


# LARA-100

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 08/06/2026



FUN-4-LARA-MK2	Transport Accessories	10103870
JP-LARA	Rigging Accessories	10102959
PICKUP-AX-LARA	Rigging Accessories	10106005
PIN-10.30	Replacement Parts	30009937
PIN-12.43	Replacement Parts	30010414
PL-LARA-MK2	Transport Accessories	15000176
PLINK1-09	Electronic Accessories	20502150
SPK18-20	Electronic Accessories	30007510
SPK18-6TRUE1	Electronic Accessories	30007511
TOP-PL-LARA	Transport Accessories	10113301
V-AX-LARA	Rigging Accessories	10106003

## PERFORMANCE DATA

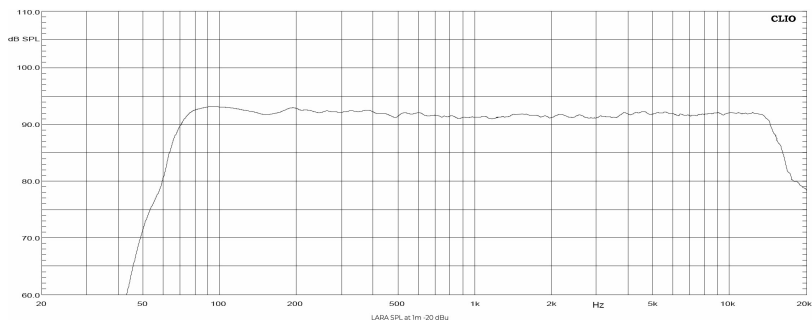


Frequency Response Curve

# LARA-100

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
 Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
 Updated (DD/MM/YYYY): 08/06/2026



120Hz  
160Hz  
200Hz  
250Hz  
300Hz  
350Hz  
400Hz

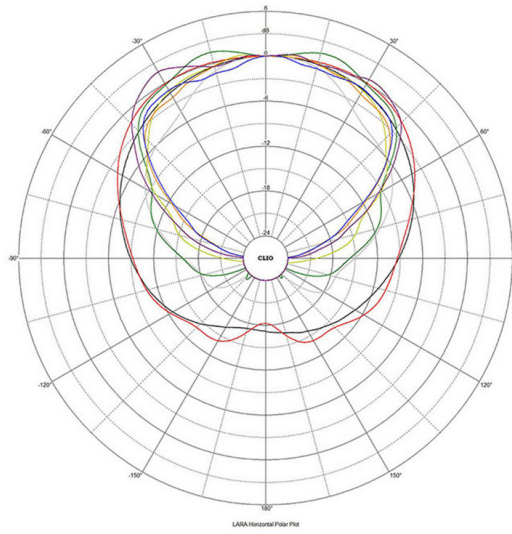

Horizontal Polar Plot

# LARA-100

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 08/06/2026

