


WR series

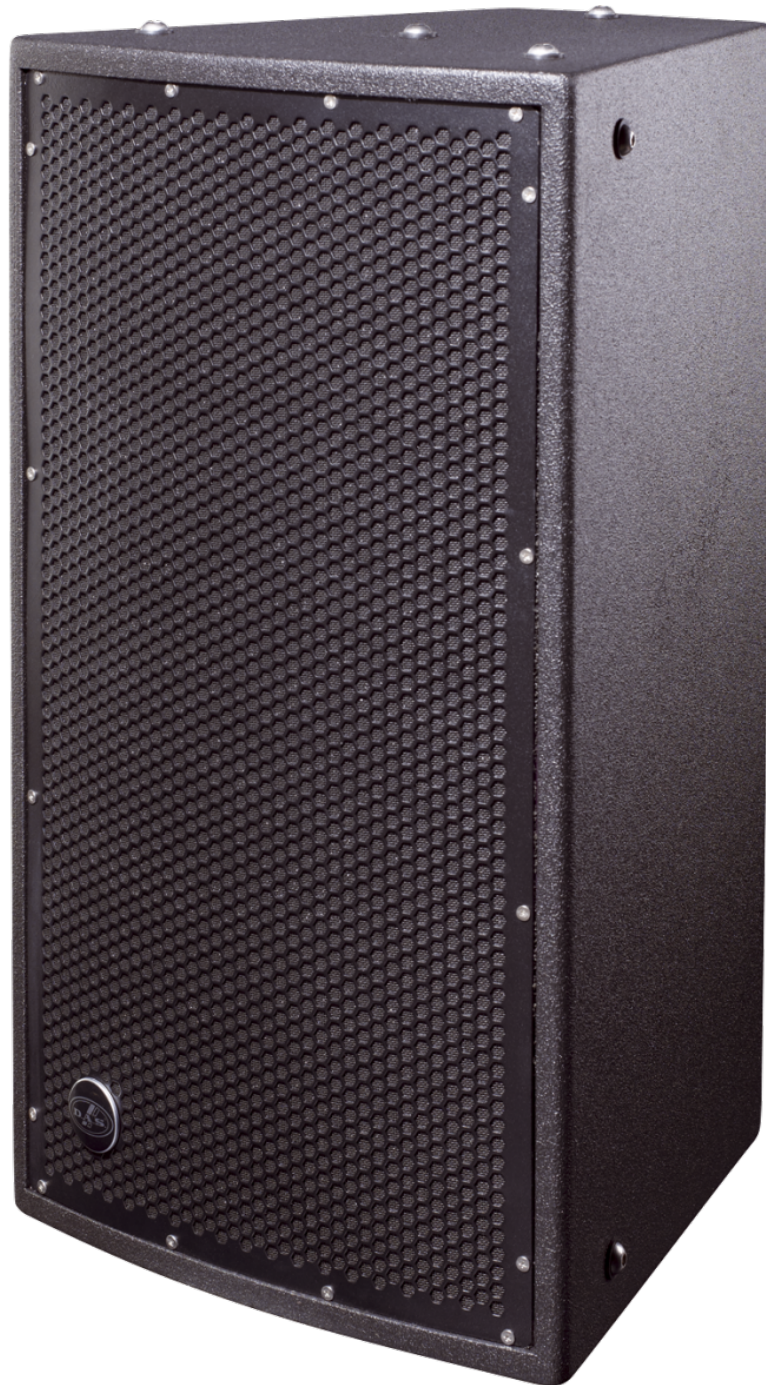

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

KEY FEATURES

- Weather resistant subwoofer system
- Environmental performance to level IP54
- Easy arraying with the WR-6412CX/DX
- Threaded fixing points for mounting accessories
- DX finish (direct exposure)
- Stainless steel fixing points

DESCRIPTION

The WR-121S is a passive subwoofer with an IP56 rating, designed for permanent professional outdoor installations. It incorporates a 12" loudspeaker with a power rating of 600 Wrms for low-frequency reproduction, providing a solid and controlled foundation for sound reinforcement systems in outdoor environments. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. In addition, the WR Series is available in CX (Covered Exposure) versions for partially covered installations, and DX (Direct Exposure) versions designed for locations fully exposed to the elements.

All WR Series systems share these protection specifications. This model corresponds to the CX version, designed for covered exposure installations and protected by an ISO-Flex polyurea coating.

WR-121S-CX

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	50 Hz – 125 Hz
Nominal Impedance	Passive: 4 ohms Biamp: 8 ohms
RMS Power Handling	600 W
Peak Power Handling	2400 W
On-axis Sensitivity 1W/1 m	96 dB SPL
Maximum Peak SPL at 1 m	130 dB

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Rectangular
Rigging	M10 Rigging Points
Finish	ISO-flex Paint
Color	Black
IP Rating	IP54
Dimensions (H x W x D)	705 x 395 x 395 mm 27,8 x 15,6 x 15,6 in
Net Weight	24,0 kg (52,9 lb)

WR-121S-CX

Components


LF Driver	12GX
-----------	------

Shipping

Carton Dimensions (H x W x D)	800 x 490 x 470 mm
	31,5 x 19,3 x 18,5 in

Shipping Weight	32,0 kg (70,4 lb)
-----------------	---------------------

DIMENSIONS

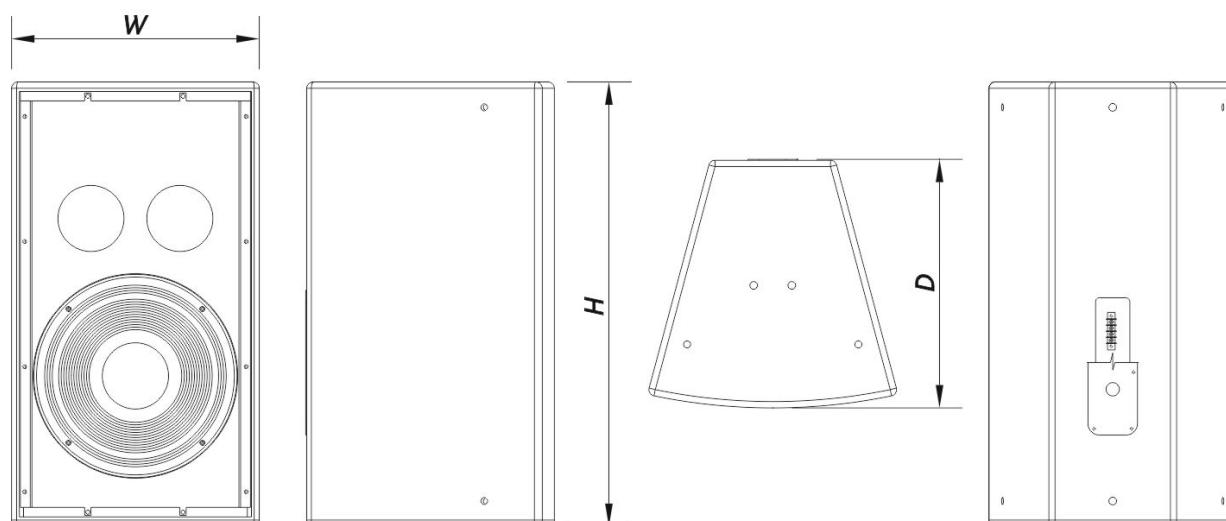

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

ORDERING INFORMATION

Model	Description	P/N
System		
WR-121S-CX		10428232
Replacement Parts		
12GX	Transducer	20208950
GM-12GX	Recone Kit	20208065
Accessories		
ANL-2	Rigging Accessories	10101020
AX-SPG1	Installation & Stacking Acc.	10105050
AXC-AT	Installation & Stacking Acc.	10104310
AXF-X12	Installation & Stacking Acc.	10104831
AXU-WR6412	Installation & Stacking Acc.	10104710

WR-121S-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

