

# WR series



## WR-121S-DX

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/07/2026

 **DAS AUDIO**

## KEY FEATURES

- Weather resistant subwoofer system
- Environmental performance to level IP54
- Easy arraying with the WR-6412CX/DX
- Threaded fixing points for mounting accessories
- DX finish (direct exposure)
- Stainless steel fixing points

## DESCRIPTION

The WR-121S is a passive subwoofer with an IP56 rating, designed for permanent professional outdoor installations. It incorporates a 12" loudspeaker with a power rating of 600 Wrms for low-frequency reproduction, providing a solid and controlled foundation for sound reinforcement systems in outdoor environments. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. In addition, the WR Series is available in CX (Covered Exposure) versions for partially covered installations, and DX (Direct Exposure) versions designed for locations fully exposed to the elements.

All WR Series systems share these protection specifications. This model corresponds to the DX version, designed for installations fully exposed to the elements and equipped with a reinforced fiberglass exterior.

# WR-121S-DX

---

## SPECIFICATIONS

### Performance

|                            |                               |
|----------------------------|-------------------------------|
| Frequency Range (-10 dB)   | 50 Hz – 125 Hz                |
| Nominal Impedance          | Passive: 4 ohms Biamp: 8 ohms |
| RMS Power Handling         | 600 W                         |
| Peak Power Handling        | 2400 W                        |
| On-axis Sensitivity 1W/1 m | 96 dB SPL                     |
| Maximum Peak SPL at 1 m    | 130 dB                        |

### Connectors

|                        |                                 |
|------------------------|---------------------------------|
| Audio Input Connector  | Covered Barrier Strip Terminals |
| Audio Output Connector | Covered Barrier Strip Terminals |

### Enclosure

|                          |                                             |
|--------------------------|---------------------------------------------|
| Enclosure Construction   | Birch Plywood                               |
| Enclosure Geometry       | Rectangular                                 |
| Rigging                  | M10 Rigging Points                          |
| Finish                   | Fiberglass                                  |
| Color                    | Black                                       |
| IP Rating                | IP54                                        |
| Dimensions ( H x W x D ) | 705 x 395 x 395 mm<br>27,8 x 15,6 x 15,6 in |
| Net Weight               | 24,0 kg ( 52,9 lb )                         |

# WR-121S-DX


## Components

|           |      |
|-----------|------|
| LF Driver | 12GX |
|-----------|------|

## Shipping

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Carton Dimensions ( H x W x D ) | 800 x 490 x 470 mm<br>31,5 x 19,3 x 18,5 in |
| Shipping Weight                 | 32,0 kg ( 70,4 lb )                         |

## DIMENSIONS

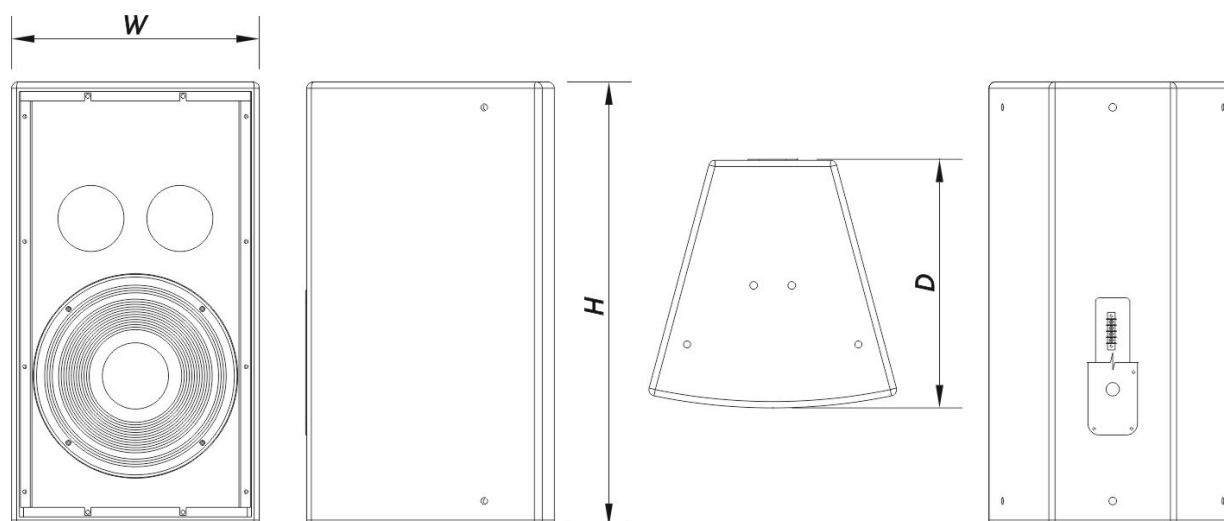

# WR-121S-DX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/07/2026



## ORDERING INFORMATION

| Model                    | Description                  | P/N      |
|--------------------------|------------------------------|----------|
| <b>System</b>            |                              |          |
| WR-121S-DX               |                              | 10428234 |
| <b>Replacement Parts</b> |                              |          |
| 12GX                     | Transducer                   | 20208950 |
| GM-12GX                  | Recone Kit                   | 20208065 |
| <b>Accessories</b>       |                              |          |
| ANL-2                    | Rigging Accessories          | 10101020 |
| AX-SPG1                  | Installation & Stacking Acc. | 10105050 |
| AXC-AT                   | Installation & Stacking Acc. | 10104310 |
| AXU-WR6412               | Installation & Stacking Acc. | 10104710 |

# WR-121S-DX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/07/2026

