



## **EVENT 28A**

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988 Fuente del Jarro - Valencia - Spain - Tel. +34961340860 Updated (DD/MM/YYYY): 03/05/2024



#### **KEY FEATURES**

- · Ultra-compact, lightweight powered line array
- · High-efficiency Class D amplifier with SMPS
- · Dual voltage mains for use anywhere in the world
- · Easy system configuration thanks to DAScontrol™
- · High-end 24-bit DSP with LCD screen
- FIR processing for constant phase response
- · FSS<sup>™</sup> Fast Set Splay rigging for quick deployment

#### DESCRIPTION

The EVENT-28A is an advanced symmetrical, compact, two-way powered line array system. Designed to provide outstanding performance and ease of use, this system features a stylish and portable polypropylene cabinet design that is both road-worthy and highly durable. With a comprehensive range of accessories, the EVENT-28A is perfect for small to mid-size rental and installation applications seeking superior sound quality.

This system integrates two 8" neodymium transducers and a single M-60 compression driver into a robust yet lightweight polymer cabinet. The 8" transducers, enhanced with neodymium magnets for reduced weight, ensure efficient sound projection and superior low-frequency response. The symmetric "V" shaped configuration of the cone transducers delivers consistent 100° horizontal coverage down to 200 Hz. The M-60 compression driver remains coupled to an advanced waveguide design, which controls the vertical dispersion and ensures precise coupling between units in vertical arrays.

Powered by a two-channel Class D amplifier, the EVENT-28A boasts 1300 Wpeak power. The amplifier's rear panel is equipped with high-quality Neutrik® XLR and powerCON connectors. Using the DAScontrol™ interface, users can quickly select presets based on the number of units in the array. The onboard DSP utilizes a 24-bit high-end processor to manage crossover, EQ, delay, and limiter functions. Incorporating FIR filtering technology, the EVENT-28A maintains constant phase response, leading to transparent sound and exceptional clarity that enhances the overall listening experience.

Installation and deployment of EVENT-28A arrays are streamlined with the innovative Fast Set Splay (FSS<sup>TM</sup>) rigging system, which allows for quick angle selection while stacked on dollies. The stainless-steel rigging hardware supports flown arrays of up to 16 units, adjustable in 1° increments from 0° to 10°.

The EVENT-28A pairs seamlessly with the flyable companion subwoofer, the EVENT-118A, ensuring robust low-frequency reinforcement. Weighing 20 kg, the EVENT-28A strikes an excellent balance between size, performance, and portability, making it an ideal solution for a wide array of sound reinforcement applications.



### **SPECIFICATIONS**

#### Performance

Frequency Range (-10 dB)	70 Hz - 20kHz
Horizontal Coverage (-6 dB)	100°
Vertical Coverage	Splay Dependent
	377 10
Maximum Peak SPL at 1 m	133 dB

### **Electronics and Connectors**


Nominal Amplifier Power (continuous)	650 W	
Nominal Amplifier Power (peak)	1300 W	
Nominal Amplifier Power LF (continuous)	500 W	
Nominal Amplifier Power LF (peak)	1000 W	
Nominal Amplifier Power HF (continuous)	150 W	
Nominal Amplifier Power HF (peak)	300 W	
Input Type	Balanced	
Input Impeadance	20 kohms	
Input Sensitivity	6.2 V (+18 dBu)	
Audio Signal Input Connector	1 x Female XLR	
Audio Signal Loop Thru Connector	1 x Male XLR	
Recommended Signal Processing	INTEGRAL-M26X	
AC Output Connector	powerCON NAC3MPB	
Current Draw 230 V / 115 V	1.2 A / 2.4 A	




### **Enclosure**

Enclosure Construction	Polypropylene	
Enclosure Geometry	Trapezoidal	
Rigging	Captive Rigging System	
Color	Black	
Dimensions ( H x W x D )	280 x 635 x 525 mm	
	11,0 x 25,0 x 20,7 in	
Net Weight	20,5 kg ( 44,1 lb )	
Components		
HF Driver	M-60	
Shipping		
Carton Dimensions ( H x W x D )	715 x 600 x 335 mm	
	28,2 x 23,6 x 13,2 in	

### **DIMENSIONS**

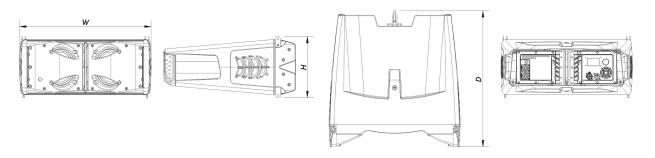

ORDERING Model Description P/N





### **INFORMATION**

### System

EVENT-28A		10435012	
Replacement Parts			
GM-M60N	Diaphragm	20205090	
M-60	Compression Driver	20208790	
PIN-8	Pin	30002877	
Accessories			
AX-EV28	Rigging Accessories	10102370	
AXC-ZT	Installation & Stacking Acc.	10104320	
AXS-EV28	Installation & Stacking Acc.	10102375	
JP-EV28	Rigging Accessories	10102961	
PL-EV28S	Transport Accessories	10113295	
PWCONLINK-09	Electronic Accessories	20502210	
SC-05	Electronic Accessories	20501010	
SC-1	Electronic Accessories	20501020	
SC-10	Electronic Accessories	20501050	
TRD-2-PACK	Installation & Stacking Acc.	10104012	
TRD-6	Installation & Stacking Acc.	10104470	
TRD-7	Installation & Stacking Acc.	10104471	

