

MIA SERIES



MIA-S110-W

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/06/2026

 **DAS AUDIO**

KEY FEATURES

- Band-Pass Ultra-Low Profile passive subwoofer
- Frequency range (-10dB): 38 Hz - 120 Hz
- Birch Plywood enclosure
- Discreet horizontal or vertical installation with minimal visual impact
- Wall-mount accessory included
- Optimized curved ports for smooth, quiet operation and noiseless performance
- White finish available
- Maximum SPL: 123 dB

DESCRIPTION

MIA-S110-W is a compact passive band-pass subwoofer designed to reinforce low frequencies in installations where visual discretion and space efficiency are important. It incorporates a high-performance 10" low-frequency transducer, with a frequency response of 38 Hz to 120 Hz and a maximum SPL of 123 dB.

Its low-profile design allows the system to be installed horizontally or vertically, facilitating integration into spaces where a compact, unobtrusive bass solution is required. MIA-S110-W complements MIA-X full-range systems by extending low-frequency response and delivering controlled reproduction at the lower end of the spectrum.

The band-pass design incorporates optimized curved ports to promote smoother airflow and reduce port noise even at high output levels. This configuration provides precise, controlled bass response while maintaining clean operation in installed sound applications.

With a nominal impedance of 8 Ω , MIA-S110-W offers flexible integration with professional amplification systems. In addition, its 250 W RMS and 1000 W peak power handling provide suitable output capability to complement compact systems from the MIA Series.

The system is manufactured from high-quality birch plywood with a durable ISO-flex paint finish. Its rectangular design and compact dimensions facilitate integration on walls, floors, or technical furniture, while the included wall-mount accessory allows simple and secure installation in different configurations. The white finish enables seamless aesthetic integration into visually sensitive environments.

MIA-S110-W is a compact, discreet solution for extending the low-frequency response of MIA-X systems in projects where bass reinforcement with minimal visual presence is required.

MIA-S110-W

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	38 Hz - 120 Hz
Nominal Impedance	8 Ohms
RMS Power Handling	250 W
Peak Power Handling	1000 W
On-axis Sensitivity 1W/1 m	93 dB SPL
Maximum Peak SPL at 1 m	123 dB
Recommended Amplifier	INTEGRAL-MA1002 INTEGRAL-MA2004
Recommended Processor	INTEGRAL-MA1002 INTEGRAL-MA2004

Connectors

Audio Input Connector	4-way Phoenix 3.8 mm
-----------------------	----------------------

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Rectangular
Finish	ISO-flex Paint
Color	Black
Dimensions (H x W x D)	215 x 540 x 528 mm 8,5 x 21,3 x 20,8 in
Net Weight	18,5 kg


MIA-S110-W

Components

LF Driver

10MG

DIMENSIONS

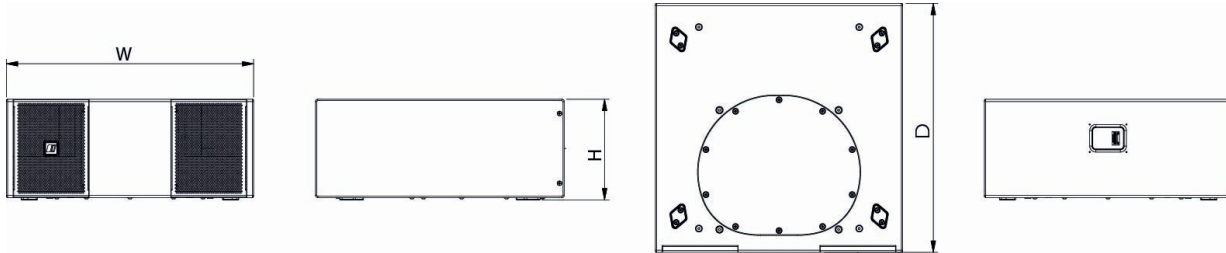

MIA-S110-W

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/06/2026

 **DAS AUDIO**

ORDERING INFORMATION

Model	Description	P/N
System		
MIA-S110-W		15006605
Replacement Parts		
10MG	Cone Transducer	20208692
GM-10MG	Recone Kit	20208422

MIA-S110-W

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 11/06/2026

