

# ACTION 500 *series*



## ACTION-M512A

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/04/2026

 **DAS AUDIO**

## KEY FEATURES

- Active monitor biamp system
- Dual-channel 1000 W<sub>peak</sub> Class D amplifier
- Birch plywood enclosure
- Durable ISO-flex paint
- DAScontrol™ interface for easy setup and adjustment
- DSP with presets and LCD screen

## DESCRIPTION

ACTION-M512A is an active stage monitor designed to deliver a highly versatile solution, from fixed installations to the popular portable monitor application. Its rotatable horn with 80° x 50° dispersion means the enclosure can also be used as a PA.

As part of our company culture, all our systems are developed under a single philosophy: to deliver the highest possible quality in terms of both materials and overall system design. In the ACTION-500 series we use the same birch plywood as our touring systems for a tight, natural warm sound found nowhere else on the market. The series' full range of active tops is complete with two balanced XLR inputs for mic and line, an additional 3.5 mm mini jack input, and a powerCON connection.

The system has a 12MI4 speaker for low frequencies and an M-34 compression driver for high frequencies which, together with the 1000 W<sub>peak</sub> Class D amplifier, deliver outstanding performance. The DAScontrol™ interface uses a high-range 24-bit DSP and rear LCD screen to enable the selection of presets, EQ modes, delay, gain control and signal source mix.

# ACTION-M512A

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	60 Hz - 20 kHz
Horizontal Coverage (-6 dB)	80°
Vertical Coverage	50°
Maximum Peak SPL at 1 m	130 dB

### Electronics and Connectors

Nominal Amplifier Power (continuous)	500 W
Nominal Amplifier Power (peak)	1000 W
Input Type	Balanced
Input Impedance	20 kohms
Input Sensitivity	1.95 V (+8 dBu)
Audio Signal Input Connector	2 x Female XLR
AUX Input	1 x 3.5 mm Mini Jack
Audio Signal Loop Thru Connector	2 x Male XLR
Control	DAScontrol™
AC Input Connector	powerCON NAC3MPA
AC Output Connector	powerCON NAC3MPB
Current Draw 230 V / 115 V	1.1 A/2.2 A

# ACTION-M512A

## Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Finish	ISO-flex Paint
Color	Black
Dimensions ( H x W x D )	335 x 650 x 450 mm 13,2 x 25,6 x 17,7 in
Net Weight	19,5 kg ( 43,0 lb )


## Components

LF Driver	12M14
HF Driver	M-34
Horn/Waveguide	BC-85

## Shipping

Carton Dimensions ( H x W x D )	383 x 747 x 503 mm 15,1 x 29,4 x 19,8 in
Shipping Weight	21,5 kg ( 47,4 lb )

## DIMENSIONS

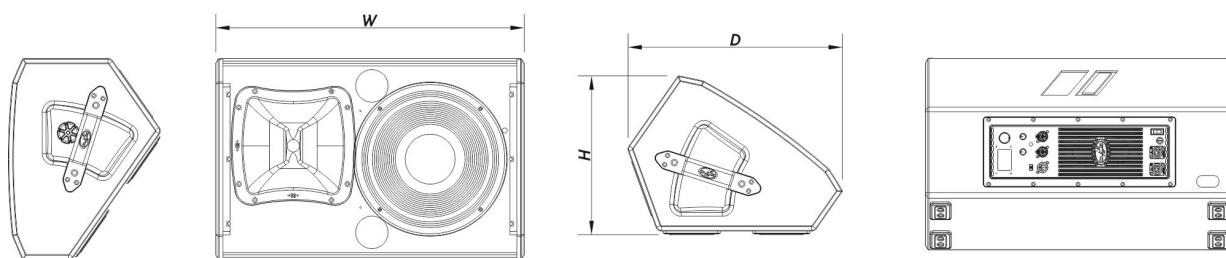

# ACTION-M512A

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/04/2026

 **DAS AUDIO**

## ORDERING INFORMATION


Model	Description	P/N
<b>System</b>		
ACTION-M512A		10427244
<b>Replacement Parts</b>		
12MI4	Cone Transducer	10214320
BC-85	Horn	30003946
DSP-ACTION-M-512A	Dsp	20406592
GM-12MI4	Recone Kit	20208300
GM-M34	Diaphragm	20205060
M-34	Compression Driver	10207080
MP-ACTM512A	Power Module	20406582
ORBIT300+100UM	Amplifier	30007231
<b>Accessories</b>		
TRD-2-PACK	Installation & Stacking Acc.	10104012
TRD-6	Installation & Stacking Acc.	10104470
TRD-7	Installation & Stacking Acc.	10104471
FUN-ACTM12	Transport Accessories	10103530

## PERFORMANCE DATA


# ACTION-M512A

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/04/2026



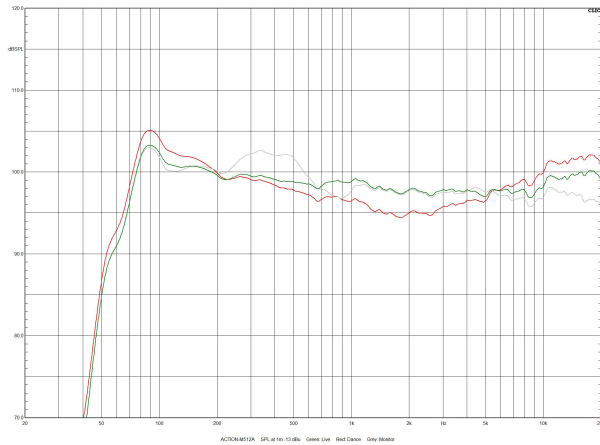

Frequency Response Curve

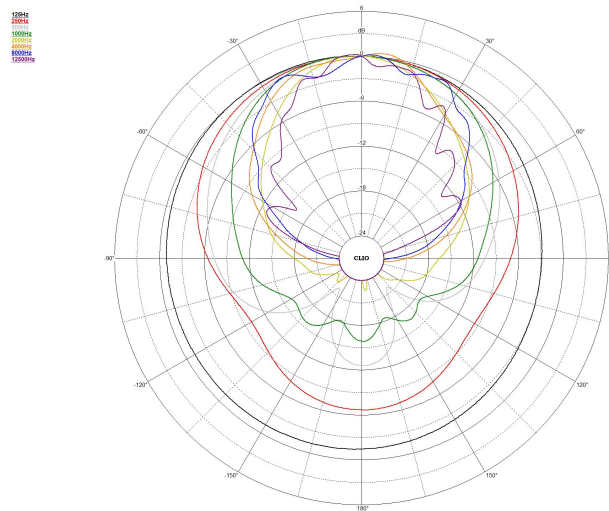


Horizontal Polar Plot

# ACTION-M512A

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
 Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
 Updated (DD/MM/YYYY): 07/04/2026



120Hz  
200Hz  
500Hz  
1000Hz  
2000Hz  
4000Hz  
8000Hz  
12000Hz

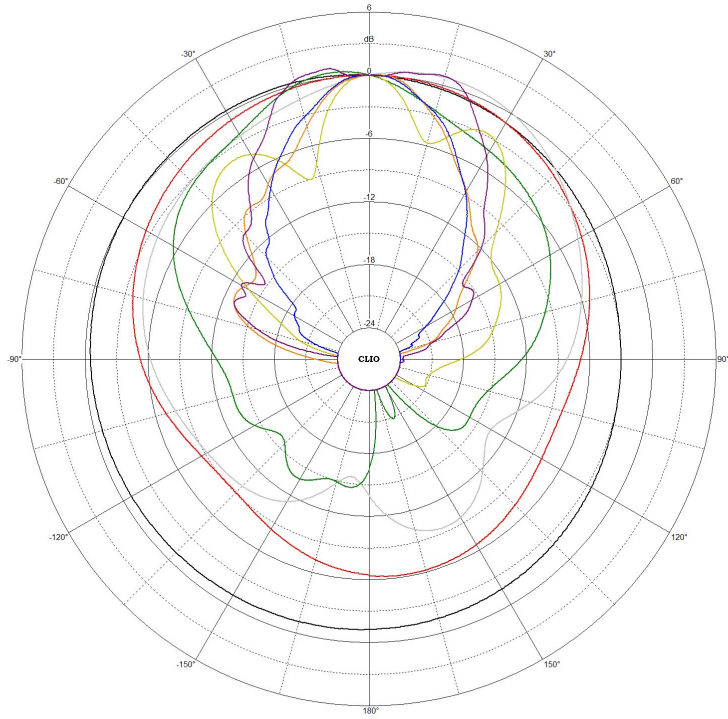

# ACTION-M512A

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 07/04/2026

