

**artec 300 series**



## **ARTEC-310.96-TW**

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

## KEY FEATURES

- 1 x 10MI low frequency loudspeaker, 2.5" VCD
- 1 x M-34 compression driver
- VESA75/VESA100 standard threaded mounting points
- Rotatable 90° x 60° horn
- Vertical or horizontal positioning
- Version with factory installed multi-tap transformer
- 12.5 W/25 W/50 W/100 W (70 V)
- 25 W/50 W/100 W (100 V)
- AXU-A310-W U-Bracket included

## DESCRIPTION

The ARTEC-310.96TW is a compact 2-way full-range loudspeaker system comprised of one 10" low frequency transducer and one M-34 compression driver with titanium diaphragm. The rotatable waveguide provides 90° x 60° coverage and allows the systems to be installed in either the vertical or horizontal position maintaining the needed dispersion characteristics.

The Artec-300 cabinets are constructed from Baltic Birch plywood and finished with a durable ISO-flex paint. The trapezoidal enclosure design helps eliminate standing wave coloration and at the same time, permits close-packed horizontal or vertical arrays.

The cabinet is fitted with M10 threaded suspension points. Four VESA75/VESA100 standard threaded mounting points on the rear of the cabinet provide a secure fixing point for DAS mounting brackets. The cabinet is delivered with a U-bracket mount and factory installed line transformer.

# ARTEC-310.96-TW

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	60 Hz – 18 kHz
Horizontal Coverage (-6 dB)	90°
Vertical Coverage	60°
Nominal Impedance	8 ohms
Transformer Taps 70 V	12.5 W, 25 W, 50 W, 100 W
Transformer Taps 100 V	25 W, 50 W, 100 W
RMS Power Handling	250 W
Peak Power Handling	1000 W
On-axis Sensitivity 1W/1 m	90 dB SPL
Maximum Peak SPL at 1 m	126 dB

Recommended Amplifier	INTEGRAL-A402
	INTEGRAL-A404
	INTEGRAL-A1002
	INTEGRAL-A1004
	INTEGRAL-A1602
	INTEGRAL-A1604
	INTEGRAL-MA1004
	INTEGRAL-MA1604

Recommended Processor	INTEGRAL-M88
	INTEGRAL-MA1604
	INTEGRAL-MA1004

### Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

# ARTEC-310.96-TW

## Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M10 Rigging Points
Finish	ISO-flex Paint
Color	White
Dimensions ( H x W x D )	610 x 295 x 345 mm 24,0 x 11,6 x 13,6 in
Net Weight	15,5 kg ( 34,2 lb )

## Components


HF Driver	M-34
Horn/Waveguide	BC-916

## Shipping

Carton Dimensions ( H x W x D )	705 x 391 x 416 mm 27,8 x 15,4 x 16,4 in
---------------------------------	---

## DIMENSIONS

# ARTEC-310.96-TW

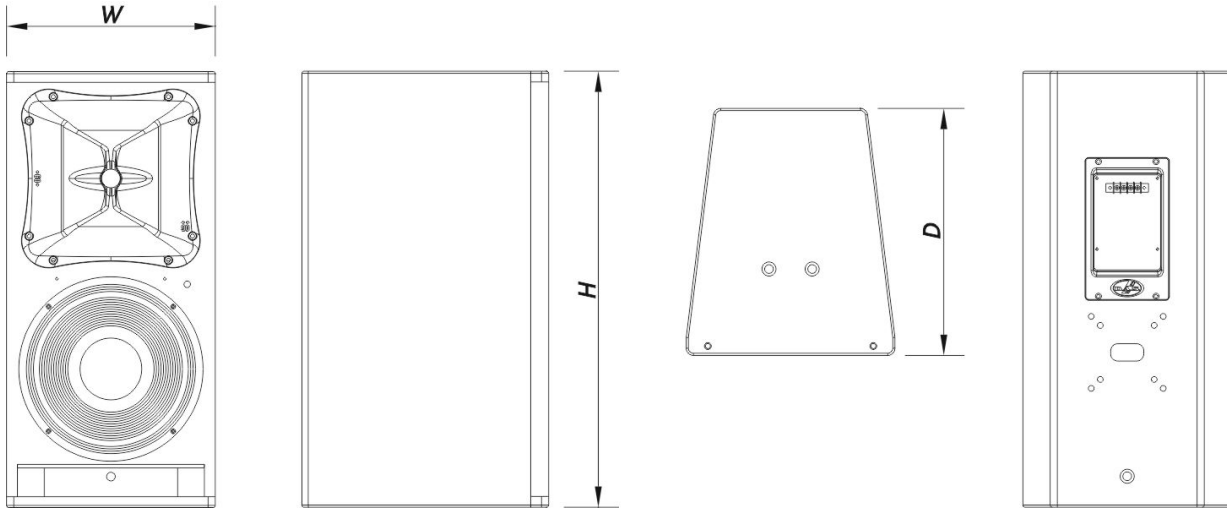

# ARTEC-310.96-TW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

## ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
ARTEC-310.96-TW		10423865
<b>Replacement Parts</b>		
BC-916	Horn	30006590
F-ACT15	Filter	30005082
GM-10MI	Recone Kit	20208421
GM-M34	Diaphragm	20205060
LAMP-F-21	Lamp	30000535
M-34	Compression Driver	10207080
<b>Accessories</b>		
ANL-2	Rigging Accessories	10101020
AX-SPG1	Installation & Stacking Acc.	10105050
AXC-AT	Installation & Stacking Acc.	10104310
AXF-AR510-W	Installation & Stacking Acc.	10104830
AXR-AR5-W	Installation & Stacking Acc.	10104880
AXW-3-W	Installation & Stacking Acc.	10104860

# ARTEC-310.96-TW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

