

# ARA

S E R I E S



## ARA-P28.74

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 24/02/2025



SOUND WITH SOUL

## KEY FEATURES

- Self-powered point source system.
- 2-channel Class D amplifier, 1200Wrms.
- 96kHz FIR processing.
- Control, monitoring, and EQ via IP through ALMA™.
- 2 x 8" (8GXN) + Compression driver, 3" VCD M78N)
- Latest generation transducers with Neodymium.
- 70° x 40° (H x V) dispersion, rotatable horn.

## DESCRIPTION

The ARA-P28.74 is a point source system that combines technical innovation with acoustic precision. Featuring a dual 8-inch speaker configuration, this model delivers a comprehensive frequency range from 70 Hz to 18 kHz. Its rotatable horn provides a horizontal coverage of 70° and vertical coverage of 40°, the ARA-P28.74 ensures uniform sound dispersion, ideal for medium to long throw applications in various settings.

Equipped with a powerful class D amplifier with universal mains switching power supply, the ARA-P28.74 offers a continuous power rating of 1200 W, with peak capabilities reaching 2400 W (1600 W for low frequencies and 800 W for high frequencies). This system boasts a maximum linear SPL of 137 dB and a peak SPL of 140 dB, ensuring powerful performance in any environment.

The advanced electronics of the ARA-P28.74 include a 96kHz sampling rate with an intuitive ALMA control interface for precise sound management. One system, one brain; each ARA-P28.74 includes a unique processing input channel working at 96kHz with 10 EQ points and a total delay of 823ms, translating to 283 meters, enhancing its versatility in system setup. The power module's DSP platform features specially designed Finite Impulse Response filters (FIR) for acoustical flat magnitude and phase response, allowing a coherent combination with other units of the ARA series, like the LARA / SARA line arrays.

At the heart of the ARA-P28.74 are our custom-manufactured transducers, the 8GXN, equipped with a neodymium magnet and a 2.5" Voice Coil Diameter (VCD). These transducers are crafted for exceptional long displacement capabilities and minimal distortion. Complementing this is the M78N compression driver, identical to those utilized in the ARA series line arrays. With a 3-inch VCD, the M78N is adept at producing crisp, clear high frequencies, contributing to the overall rich and detailed audio experience the ARA-P28.74 offers.

Designed with versatility in mind, the ARA-P28.74 comes equipped with M10 rigging points, accommodating a vast array of accessories. This adaptability makes it perfect for a wide range of venues, configurations and uses.

# ARA-P28.74

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	70 Hz - 18 kHz
Horizontal Coverage (-6 dB)	70°
Vertical Coverage	40°
Maximum Linear SPL <sup>1</sup>	134 dB
Maximum SPL <sup>2</sup>	140 dB

1. Measured Maximum Linear SPL at 1m according to AES75 standard using 18dB crest factor M-Noise.

2. Measured Maximum SPL at 1m using burst noise.

### Electronics and Connectors

Nominal Amplifier Power (continuous)	1200 W
Nominal Amplifier Power LF (continuous)	800 W
Nominal Amplifier Power LF (peak)	1600 W
Nominal Amplifier Power HF (continuous)	400 W
Nominal Amplifier Power HF (peak)	800 W
Input Type	Balanced Analog
Input Impedance	20 kohms
Input Sensitivity	6.2 V (+18 dBu)
Audio Signal Input Connector	1 x Female XLR
Audio Signal Loop Thru Connector	1 x Male XLR
Audio/Data Input Connector	etherCON
Control	ALMA
Audio + Data Loop Thru Connector	etherCON
AC Output Connector	powerCON TRUE1

# ARA-P28.74

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 24/02/2025



SOUND WITH SOUL

Current Draw 230 V / 115 V	1.8 A/3.6 A
----------------------------	-------------

Sampling Rate	96kHz
---------------	-------

### Enclosure

Enclosure Construction	Birch Plywood
------------------------	---------------

Enclosure Geometry	Trapezoidal 5°
--------------------	----------------

Rigging	M10 Rigging Points
---------	--------------------

Finish	ISO-flex Paint
--------	----------------

Color	Black
-------	-------

IP Rating	IP43
-----------	------

Dimensions ( H x W x D )	610 x 265 x 405 mm 24,0 x 10,5 x 16,0 in
--------------------------	---

Net Weight	23,4 kg ( 51,5 lb )
------------	---------------------

### Components

LF Driver	8GXN
-----------	------

HF Driver	M-78N
-----------	-------


## DIMENSIONS

# ARA-P28.74

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 24/02/2025



SOUND WITH SOUL

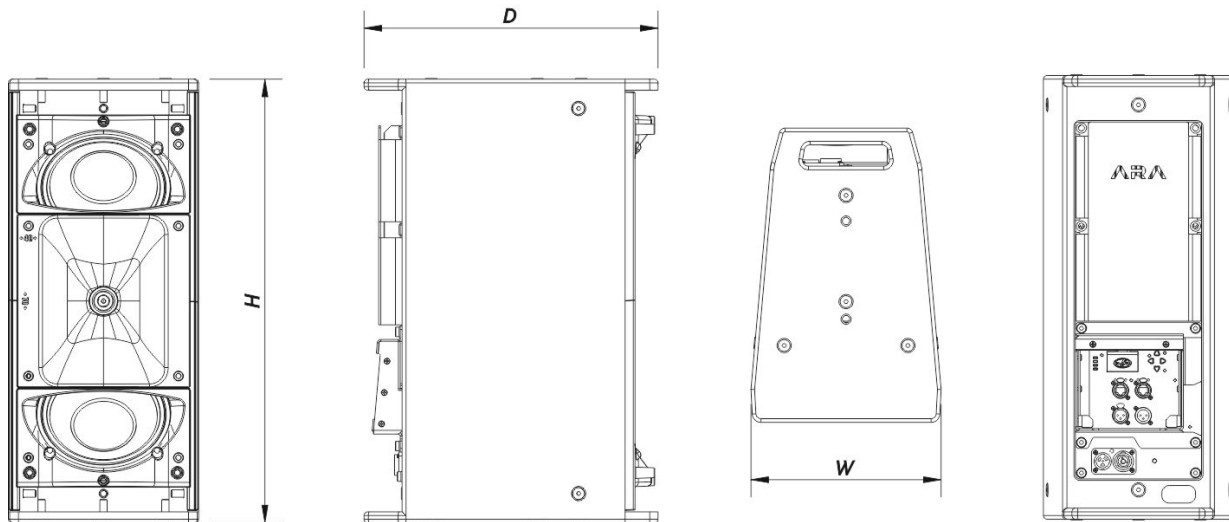

## ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
ARA-P28.74		10420540
<b>Replacement Parts</b>		
8GXN	Cone Transducer	20208988
GM-8GX	Recone Kit	20208538
GM-M75N	Diaphragm	20205080
KIT-DSP-ARA-P28.74	Replacement Dsp	20701140
M-78N	Compression Driver	20208860
<b>Accessories</b>		
ANL-2	Rigging Accessories	10101020
AX-SPG1	Installation & Stacking Acc.	10105050

# ARA-P28.74

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
 Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
 Updated (DD/MM/YYYY): 24/02/2025



AX-SPG2	Installation & Stacking Acc.	10105060
AX-TRM8	Installation & Stacking Acc.	10105061
AXC-AT	Installation & Stacking Acc.	10104310
AXC-ATSPG	Installation & Stacking Acc.	10105150
AXC-ZT	Installation & Stacking Acc.	10104320
AXC-ZT3	Installation & Stacking Acc.	10104327
AXF-X8	Installation & Stacking Acc.	10104832
AXR-AR5	Installation & Stacking Acc.	10104870
AXU-AP28	Installation & Stacking Acc.	10105151
EC-09	Electronic Accessories	20502110
EC-20	Electronic Accessories	20502130
ECPK-20	Electronic Accessories	20502180
ECPK-5	Electronic Accessories	20502100
FC-ARAP28	Transport Accessories	10116130
FUN-ARA-P28	Transport Accessories	10103810
JP-AP2815	Rigging Accessories	10102962
JP-AP2859	Rigging Accessories	10102963
MATRIX-22	Ara Series	11106140
PLINK1-09	Electronic Accessories	20502150
PP-4	Ara Series	11106150
TRD-2-PACK	Installation & Stacking Acc.	10104012
TRD-6	Installation & Stacking Acc.	10104470
TRD-7	Installation & Stacking Acc.	10104471

# ARA-P28.74

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 24/02/2025

