


# HQ series



## HQ-112.95-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 16/04/2025

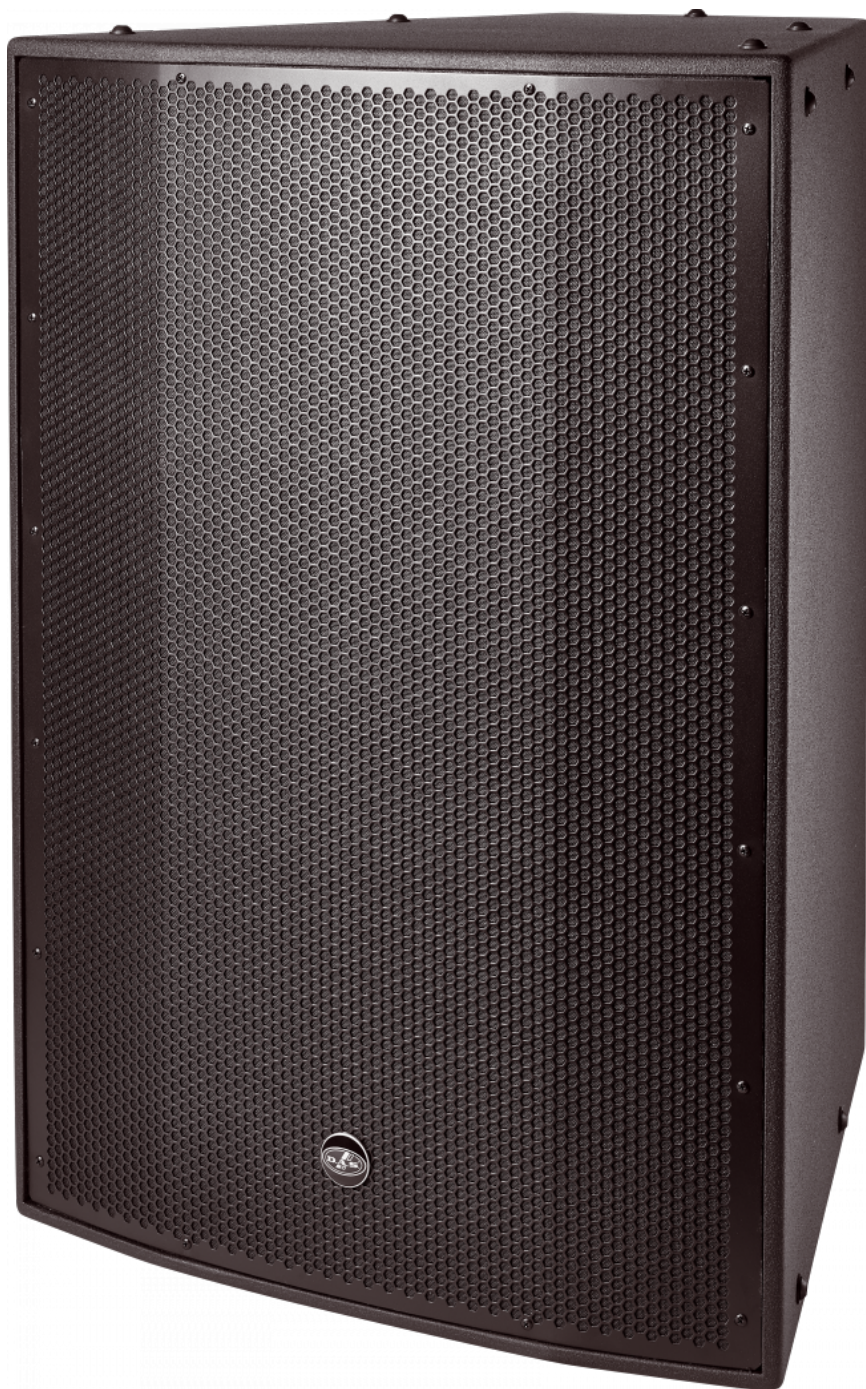

SOUND WITH SOUL

## KEY FEATURES

- Two-way long-throw system
- CX finish (ISO-flex) for covered exposure
- Horn loaded 12" low frequency loudspeaker
- M-78N neodymium compression driver
- Selectable passive/bi-amplified operating modes
- Tight 90° x 50° coverage angles
- Rotatable horns
- Stainless steel rigging kit

## DESCRIPTION

The HQ-112.95 is a passive full-range or bi-amplified configurable two-way system designed for long-throw applications, providing efficient coverage over large distances. Equipped with a 12" mid-bass speaker, coupled with a high-Q waveguide to optimize coverage and performance, and an M-78N compression driver with a 1.5" titanium diaphragm, the system is optimized to deliver clear and precise acoustic response. Additionally, it features two rotatable waveguides, one for mid frequencies and another for high frequencies, allowing flexible installation in various configurations.

The HQ-112.95 covers a frequency range of 80 Hz to 18 kHz, reaching a maximum sound pressure level of 143 dB SPL in passive mode. It has a power handling capacity of 400 W RMS and 1600 W peak in passive mode, with a nominal impedance of 8 ohms. In bi-amplified mode, the system handles up to 400 W RMS for mid frequencies and 150 W RMS for high frequencies.

The system is available in two versions: CX (covered exposure), which is protected with an ISO-flex coating both externally and internally, and DX (direct exposure), which adds an outer fiberglass layer and an internal gel seal for enhanced weather resistance. Both versions comply with IP54 standards, ensuring durability in demanding environments.

Equipped with M10 rigging points, the HQ-112.95 provides controlled 90° x 50° coverage, making it ideal for large venues, arenas, or auditoriums. It is designed to ensure precise dispersion in both horizontal and vertical orientations.

# HQ-112.95-CX

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	80 Hz – 18 kHz
Horizontal Coverage (-6 dB)	90°
Vertical Coverage	50°
Nominal Impedance	Passive: 8 ohms
Nominal Impedance MF	8 ohms
Nominal Impedance HF	8 ohms
RMS Power Handling	Passive: 400 W
RMS Power Handling HF	150 W
RMS Power Handling MF	400 W
Peak Power Handling	Passive: 1600 W
Peak Power Handling MF	1600 W
Peak Power Handling HF	400 W
On-axis Sensitivity 1W/1 m	Passive: 109 dB SPL
On-axis Sensitivity 1W/1 m MF	109 dB SPL
On-axis Sensitivity 1W/1 m HF	109 dB SPL
Maximum Peak SPL at 1 m	Passive: 141 dB
Maximum Peak SPL at 1 m MF	141 dB
Maximum Peak SPL at 1 m HF	137 dB
Recommended Processor	INTEGRAL-M88
	INTEGRAL-MA1604
	INTEGRAL-MA1004

# HQ-112.95-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 16/04/2025



Audio Input Connector	1 x speakON NL4 Covered Barrier Strip Terminals
-----------------------	--

Audio Output Connector	1 x speakON NL4 Covered Barrier Strip Terminals
------------------------	--

## Enclosure

Enclosure Construction	Birch Plywood
------------------------	---------------

Enclosure Geometry	Trapezoidal
--------------------	-------------

Rigging	M10 Rigging Points
---------	--------------------

Finish	Fiberglass
--------	------------

Color	Black
-------	-------

Dimensions ( H x W x D )	990 x 685 x 605 mm 39,0 x 27,0 x 24,0 in
--------------------------	---

Net Weight	56,0 kg ( 123,5 lb )
------------	----------------------

## Components

LF Driver	12HQN
-----------	-------

HF Driver	M-78N
-----------	-------

Horn/Waveguide	BCH-9050-7037 BCM-7545-7037
----------------	--------------------------------

## Shipping

Carton Dimensions ( H x W x D )	1.070 x 650 x 745 mm 42,1 x 25,6 x 29,3 in
---------------------------------	---

Shipping Weight	60,5 kg ( 133,4 lb )
-----------------	----------------------


## Connectors

# HQ-112.95-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 16/04/2025



## DIMENSIONS

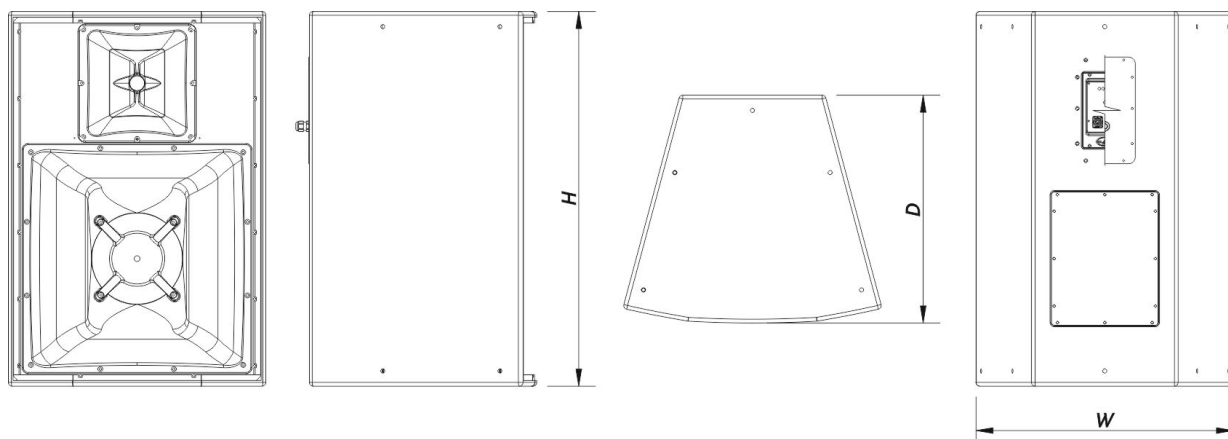

## ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
HQ-112.95-CX		10432100
<b>Replacement Parts</b>		
12HQN	Cone Transducer	20208890
BCH-9050-7037	Horn	30006308
BCM-7545-7037	Horn	30006311
F-HQ112.64.95	Filter	30009041
GM-12HQ	Recone Kit	20208536
GM-M75N	Diaphragm	20205080
M-78N	Compression Driver	20208860
<b>Accessories</b>		

# HQ-112.95-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 16/04/2025



ANL-2	Rigging Accessories	10101020
AX-HQ-X12	Rigging Accessories	10107001
JP-HQ-112	Rigging Accessories	10107003
UFB	Rigging Accessories	10105040

# HQ-112.95-CX

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 16/04/2025

