

# ***Altea***<sup>400</sup>



## **ALTEA-408-T**

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 26/05/2026

 **DAS AUDIO**

## KEY FEATURES

- 2-way, full range system
- 8" bass loudspeaker
- 1" compression driver
- Angled enclosure design for stage monitor use
- Built-in rigging points
- Stand mountable

## DESCRIPTION

ALTEA-408 is a passive system designed to offer exceptional sound quality in a wide variety of applications, from PA in small events, to stage monitor and fixed installations. Altea-408 is capable of reproducing frequencies from 70 Hz to 20 kHz and delivers a maximum SPL of 122 dB, making it an extremely versatile system.

The system features a powerful 8" transducer with 2" voice coil for the reproduction of mid and low frequencies. For the high frequencies, the system features a compression driver with a 1" voice coil, offering exceptional performance. This configuration ensures exceptional clarity and outstanding performance. The diffuser designed to provide a 90° x 90° dispersion guarantees together with the rest of the components a wide and uniform sound dispersion.

ALTEA-408 is made of high-quality polypropylene, making it an extremely rugged and lightweight system, weighing only 9.4 kg (20.7 lb). Equipped with integrated ergonomic handles and M8 rigging points, this system is easy to transport and install, offering a practical and efficient solution for any sound setup.

The ALTEA-408-T is a variant specifically designed for applications requiring connection to 70V/100V distributed audio systems, commonly used in commercial installations. It incorporates a high-quality built-in transformer that ensures optimal impedance matching, minimizing signal loss and distortion while providing electrical isolation.

# ALTEA-408-T

---

## SPECIFICATIONS

### Performance

|                             |                                                   |
|-----------------------------|---------------------------------------------------|
| Frequency Range (-10 dB)    | 70 Hz - 20 kHz                                    |
| Horizontal Coverage (-6 dB) | 90°                                               |
| Vertical Coverage           | 90°                                               |
| Nominal Impedance           | 8 ohms                                            |
| Transformer Taps 70 V       | 12.5 W - 25 W - 50 W - 100 W                      |
| Transformer Taps 100 V      | 25 W - 50 W - 100 W                               |
| RMS Power Handling          | 150 W                                             |
| Peak Power Handling         | 600 W                                             |
| On-axis Sensitivity 1W/1 m  | 94 dB SPL                                         |
| Maximum Peak SPL at 1 m     | 122 dB                                            |
| Recommended Amplifier       | INTEGRAL-A402<br>INTEGRAL-A1002<br>INTEGRAL-A1004 |

### Connectors

|                        |                                 |
|------------------------|---------------------------------|
| Audio Input Connector  | Covered Barrier Strip Terminals |
| Audio Output Connector | Spring Terminals                |

# ALTEA-408-T

## Enclosure

|                          |                                             |
|--------------------------|---------------------------------------------|
| Enclosure Construction   | Polypropylene                               |
| Enclosure Geometry       | Trapezoidal                                 |
| Rigging                  | M8 Rigging Points                           |
| Color                    | Black                                       |
| Dimensions ( H x W x D ) | 480 x 280 x 260 mm<br>18,9 x 11,0 x 10,2 in |
| Net Weight               | 8,5 kg ( 18,7 lb )                          |

## Components


|           |      |
|-----------|------|
| LF Driver | 8GV  |
| HF Driver | M-32 |

## Shipping

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Carton Dimensions ( H x W x D ) | 550 x 350 x 340 mm<br>21,6 x 13,8 x 13,4 in |
| Shipping Weight                 | 12,0 kg ( 26,5 lb )                         |

## DIMENSIONS

# ALTEA-408-T

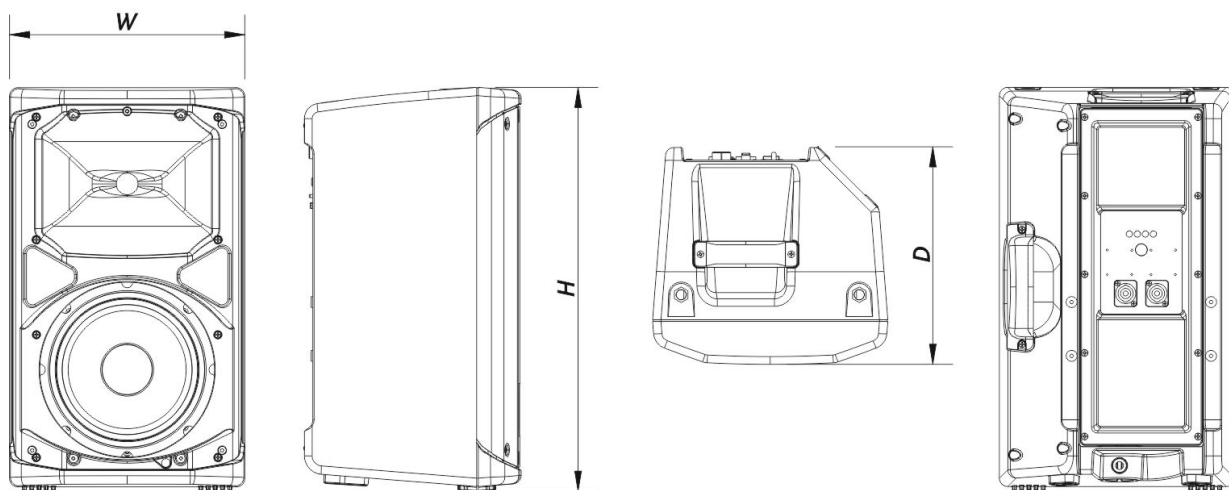

# ALTEA-408-T

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 26/05/2026

 **DAS AUDIO**

## ORDERING INFORMATION

| Model                    | Description                  | P/N      |
|--------------------------|------------------------------|----------|
| <b>System</b>            |                              |          |
| ALTEA-408-T              |                              | 10404992 |
| <b>Replacement Parts</b> |                              |          |
| 8GV                      | Cone Transducer              | 20208984 |
| M-32                     | Compression Driver           | 20208970 |
| TC-ALT408                | Filter                       | 20150100 |
| <b>Accessories</b>       |                              |          |
| ANL-1                    | Installation & Stacking Acc. | 10101010 |
| AXW-ALT                  | Installation & Stacking Acc. | 10102391 |
| TRD-2-PACK               | Installation & Stacking Acc. | 10104012 |
| TRD-6                    | Installation & Stacking Acc. | 10104470 |
| TRD-7                    | Installation & Stacking Acc. | 10104471 |
| ANL-1                    | Rigging Accessories          | 10101010 |
| FUN-AL408                | Transport Accessories        | 10103782 |

# ALTEA-408-T

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 26/05/2026

