

**artec 300 series**



## **ARTEC-306-T**

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

## KEY FEATURES

- 1 x 6B low frequency loudspeaker
- 1 x M-26 compression driver
- Vertical or horizontal positioning
- Rotatable 90° x 60° horn
- VESA75/VESA100 standard threaded mounting points
- Factory installed multi-tap transformer available
- 12.5 W/25 W/50 W/100 W (70 V)
- 25 W/50 W/100 W (100 V)
- U-Bracket included

## DESCRIPTION

The ARTEC-306-T 2-way passive full range loudspeaker utilizes a 6" low frequency transducer and the M-26 compression driver. The cabinet is manufactured using top quality Birch plywood and finished with a durable black paint finish. Thanks to its small size, it is ideal for venues with low ceilings, or limited space.

The Artec-300 cabinets are constructed from Baltic Birch plywood and finished with a durable ISO-flex paint. The trapezoidal enclosure design helps eliminate standing wave coloration and at the same time, permits close-packed horizontal or vertical arrays.

A rotatable horn allows the systems to be installed in either the vertical or horizontal position maintaining the needed dispersion characteristics. The cabinet is delivered with a U-bracket mount and factory installed line transformer.

# ARTEC-306-T

---

## SPECIFICATIONS

### Performance

|                             |                           |
|-----------------------------|---------------------------|
| Frequency Range (-10 dB)    | 70 Hz – 20 kHz            |
| Horizontal Coverage (-6 dB) | 90°                       |
| Vertical Coverage           | 60°                       |
| Nominal Impedance           | 8 ohms                    |
| Transformer Taps 70 V       | 12.5 W, 25 W, 50 W, 100 W |
| Transformer Taps 100 V      | 25 W, 50 W, 100 W         |
| RMS Power Handling          | 100 W                     |
| Peak Power Handling         | 400 W                     |
| On-axis Sensitivity 1W/1 m  | 90 dB SPL                 |
| Maximum Peak SPL at 1 m     | 116 dB                    |
| Recommended Amplifier       | INTEGRAL-A402             |
|                             | INTEGRAL-A404             |
|                             | INTEGRAL-A1002            |
|                             | INTEGRAL-A1004            |
|                             | INTEGRAL-A1602            |
|                             | INTEGRAL-A1604            |
|                             | INTEGRAL-MA1004           |
|                             | INTEGRAL-MA1604           |
| Recommended Processor       | INTEGRAL-M88              |
|                             | INTEGRAL-MA1604           |
|                             | INTEGRAL-MA1004           |

### Connectors

|                        |                                 |
|------------------------|---------------------------------|
| Audio Input Connector  | Covered Barrier Strip Terminals |
| Audio Output Connector | Covered Barrier Strip Terminals |

# ARTEC-306-T

## Enclosure

|                          |                                            |
|--------------------------|--------------------------------------------|
| Enclosure Construction   | Birch Plywood                              |
| Enclosure Geometry       | Trapezoidal                                |
| Rigging                  | M10 Rigging Points                         |
| Finish                   | ISO-flex Paint                             |
| Color                    | Black                                      |
| Dimensions ( H x W x D ) | 385 x 195 x 260 mm<br>15,2 x 7,7 x 10,2 in |
| Net Weight               | 8,0 kg ( 17,6 lb )                         |

## Components


|                |        |
|----------------|--------|
| LF Driver      | 6B     |
| HF Driver      | M-26   |
| Horn/Waveguide | BCT-96 |

## Shipping

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Carton Dimensions ( H x W x D ) | 471 x 266 x 330 mm<br>18,5 x 10,5 x 13,0 in |
| Shipping Weight                 | 10,5 kg ( 23,2 lb )                         |

## DIMENSIONS

# ARTEC-306-T

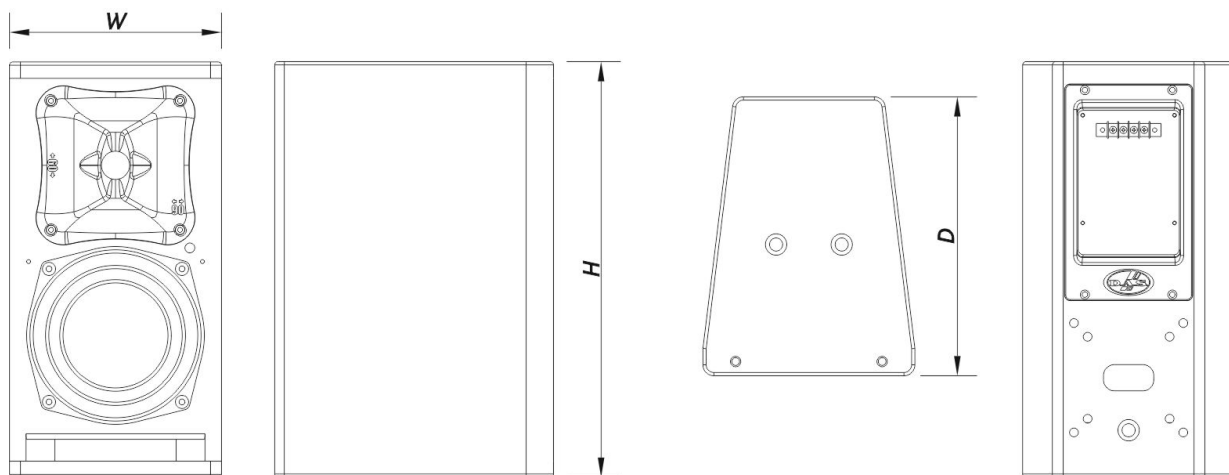

# ARTEC-306-T

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

## ORDERING INFORMATION

| Model                    | Description                  | P/N      |
|--------------------------|------------------------------|----------|
| <b>System</b>            |                              |          |
| ARTEC-306-T              |                              | 10423846 |
| <b>Replacement Parts</b> |                              |          |
| 6B                       | Cone Transducer              | 20208260 |
| BCT-96                   | Horn                         | 30006201 |
| F-ACT8                   | Filter                       | 30005424 |
| GM-M26                   | Diaphragm                    | 20205050 |
| LAMP-F-18                | Lamp                         | 30000536 |
| M-26                     | Compression Driver           | 10207070 |
| <b>Accessories</b>       |                              |          |
| AX-SPG1                  | Installation & Stacking Acc. | 10105050 |
| AXC-AT                   | Installation & Stacking Acc. | 10104310 |
| AXR-AR5                  | Installation & Stacking Acc. | 10104870 |
| AXW-3                    | Installation & Stacking Acc. | 10104850 |
| ANL-2                    | Rigging Accessories          | 10101020 |

# ARTEC-306-T

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

