

WR series



WR-322S-DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

KEY FEATURES

- Weather resistant subwoofer system
- Fiberglass exterior finish
- 1600 W program power handling
- 2 x 12P low frequency loudspeakers, 3" VCD
- For use in bi-amplified systems
- Rigging compatible with the WR-320-DXW

DESCRIPTION

The WR-322S is a passive subwoofer with an IP56 rating, designed for permanent professional outdoor installations. It incorporates two 12" loudspeakers in a bass reflex configuration for low-frequency reproduction. Its frequency response extends down to 37 Hz. This subwoofer is designed to reinforce low-frequency reproduction in WR-320-DX line array systems. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. All systems in the WR series share these protection specifications.

The WR-322S-DX is manufactured exclusively in the DX (Direct Exposure) version, designed for installations fully exposed to the elements and equipped with a reinforced fiberglass exterior.

WR-322S-DXW

SPECIFICATIONS

Performance

Frequency Range (-10 dB)	37 Hz – 300 Hz
Nominal Impedance	4 ohms
RMS Power Handling	800 W
Peak Power Handling	3200 W
On-axis Sensitivity 1W/1 m	99 dB SPL
Maximum Peak SPL at 1 m	132 dB

Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Rectangular
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	White
IP Rating	IP54
Dimensions (H x W x D)	365 x 700 x 690 mm 14,4 x 27,6 x 27,2 in
Net Weight	48,5 kg (106,9 lb)

WR-322S-DXW


Components

LF Driver	12P
-----------	-----

Shipping

Carton Dimensions (H x W x D)	470 x 800 x 740 mm 18,5 x 31,5 x 29,1 in
Shipping Weight	52,5 kg (115,7 lb)

DIMENSIONS

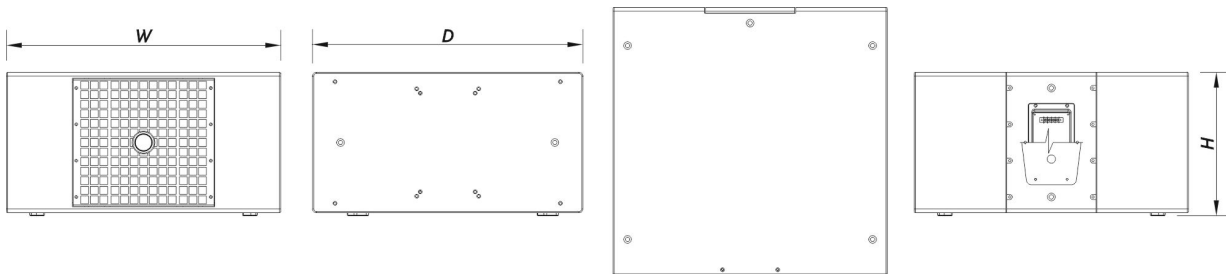

WR-322S-DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

ORDERING INFORMATION

Model	Description	P/N
System		
WR-322S-DXW		10428248
Replacement Parts		
12P	Cone Transducer	10209050
GM-12P	Recone Kit	20208110
Accessories		
ANL-2	Rigging Accessories	10101020
AX-WR300-W	Rigging Accessories	10102976
JP-WR320-W	Rigging Accessories	10102978

WR-322S-DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988
Fuente del Jarro - Valencia - Spain - Tel. +34961340860
Updated (DD/MM/YYYY): 14/04/2026

