

# EN54 series



## WR-6415-DXW

---

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

 **DAS AUDIO**

## KEY FEATURES

- 2-way system for outdoor installation
- DX finish (Fiberglass) for direct exposure
- IP56 ingress protection rating
- 15AV woofer with 3" voice coil
- M-75 compression driver with 3" diaphragm
- Rotatable 60° x 40° horn design
- Stainless steel fixing points

## DESCRIPTION

The WR-6415 is a passive two-way system with an IP56 rating, designed for permanent professional outdoor installations. It incorporates a 15AV loudspeaker for low-frequency reproduction and an M-75 compression driver with a 3" titanium diaphragm coupled to a rotatable 60° x 40° horn that delivers clear and defined high-frequency reproduction. Its ultra-compact enclosure, made of birch plywood, minimizes unwanted vibrations and helps reduce distortion while maintaining stable acoustic performance under demanding conditions. This model is available in black or white finishes to facilitate integration into different environments.

The WR Series is designed to offer high resistance and durability in permanent outdoor installations. All metal components of the system are made of stainless steel to ensure high corrosion resistance. The connectors feature protection against liquids and dust through hermetic sealing and include a drainage system that prevents water accumulation. The grilles incorporate a three-layer textile barrier composed of acoustic fabric, filtering foam and a hydrophobic mesh that blocks dust, dirt and moisture without affecting sonic performance. In addition, the WR Series is available in CX (Covered Exposure) versions for partially covered installations, and DX (Direct Exposure) versions designed for locations fully exposed to the elements.

All WR Series systems share these protection specifications. This model corresponds to the DX version, designed for installations fully exposed to the elements and equipped with a reinforced fiberglass exterior.

# WR-6415-DXW

---

## SPECIFICATIONS

### Performance

Frequency Range (-10 dB)	55 Hz – 20 kHz
Horizontal Coverage (-6 dB)	60°
Vertical Coverage	40°
Nominal Impedance	8 ohms
RMS Power Handling	400 W
Peak Power Handling	1600 W
On-axis Sensitivity 1W/1 m	99 dB SPL
Maximum Peak SPL at 1 m	131 dB
Recommended Amplifier	INTEGRAL-A402
	INTEGRAL-A404
	INTEGRAL-A1002
	INTEGRAL-A1004
	INTEGRAL-A1602
	INTEGRAL-A1604
	INTEGRAL-MA1004
Recommended Processor	INTEGRAL-MA1604
	INTEGRAL-MA1004
	INTEGRAL-M88

### Connectors

Audio Input Connector	Covered Barrier Strip Terminals
Audio Output Connector	Covered Barrier Strip Terminals

# WR-6415-DXW

## Enclosure

Enclosure Construction	Birch Plywood
Enclosure Geometry	Trapezoidal
Rigging	M10 Rigging Points
Finish	Fiberglass
Color	White
IP Rating	IP56
Dimensions ( H x W x D )	775 x 465 x 460 mm 30,5 x 18,3 x 18,1 in
Net Weight	36,0 kg ( 79,3 lb )

## Components


LF Driver	15AV
HF Driver	M-75
Horn/Waveguide	BC-64AL

## Shipping

Carton Dimensions ( H x W x D )	842 x 525 x 535 mm 33,1 x 20,7 x 21,1 in
Shipping Weight	39,5 kg ( 87,0 lb )

## DIMENSIONS

# WR-6415-DXW

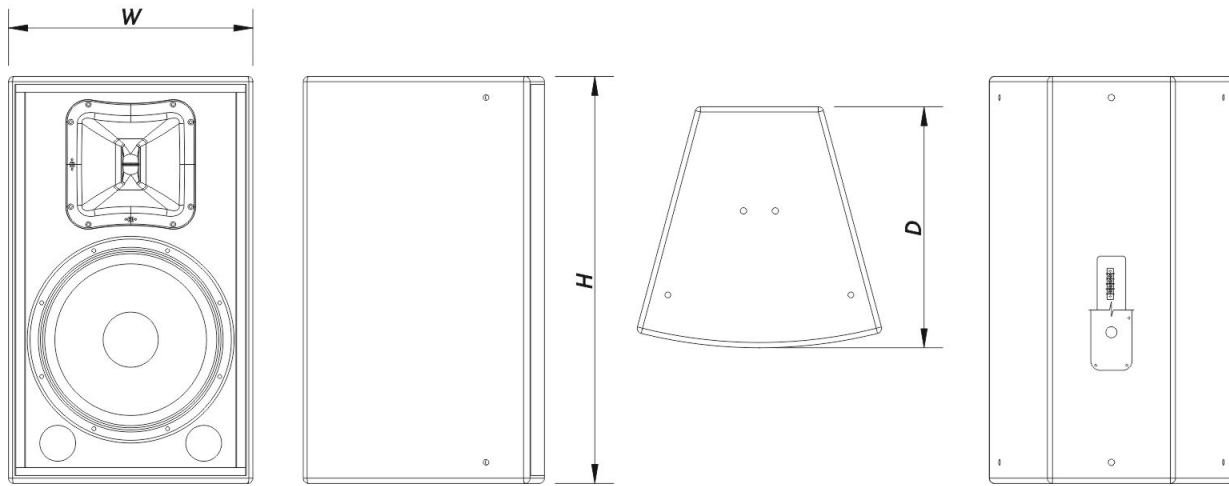

# WR-6415-DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026



## ORDERING INFORMATION

Model	Description	P/N
<b>System</b>		
WR-6415-DXW		10428150
<b>Replacement Parts</b>		
15AV	Cone Transducer	20208630
BC-64AL	Horn	30004873
F-WR6412-5	Filter	30005703
GM-15P	Recone Kit	20208100
GM-M75N	Diaphragm	20205080
M-75	Compression Driver	10208100
<b>Accessories</b>		
ANL-2	Rigging Accessories	10101020
AX-SPG1	Installation & Stacking Acc.	10105050
AXC-AT	Installation & Stacking Acc.	10104310
AXU-WR6415-W	Installation & Stacking Acc.	10104690

# WR-6415-DXW

DAS Audio Group, S.L. - C/ Islas Baleares 24 - 46988  
Fuente del Jarro - Valencia - Spain - Tel. +34961340860  
Updated (DD/MM/YYYY): 14/04/2026

